



Net.Time Ω has been designed in a modular way to solve any synchronization need of the industry, so that it is possible to integrate under the same architecture any combination of the most common timing protocols.

## Datasheet

Updated on 6/6/25  
DS-Net-Time-Omega-v9.4.fm

# Net.Time Ω - flexible time server

Net.Time Ω has redundant power supply and references. Offers multiple input and output options that allow versatile combinations over up to four independent electrical or optical Gigabit Ethernet ports to facilitate the translation of time protocols and PTP profiles.

### 1. Mainframe Ports

Table 1. Signals and interfaces in the mainframe

	GNSS	PTP	NTP	SyncE	ToD	IRIG-B	PPS	T1/E1	MHz
RJ45 (A)		out	out	out					
SFP (A)		out	out	out					
RJ45 (B)		in/out	in/out	in/out					
SFP (B)		in/out	in/out	in/out					
RJ48 (C)					in			in	in
RJ48 (D)					out			out	out
SMB (E)						out	out		
SMB (F)						in	in		
SMA (G)	in								
SMB (H)									in/out
RJ48 (I)					in/out	in/out		out	out

- RJ45 (A, B): PTP, NTP, SyncE
- SFP (A, B): PTP, NTP, SyncE
- RJ48 (C, D): ToD (NMEA, G.8271), 1.0/ 1.544 / 2.048 / 5.0 / 10.0 MHz, 1544 / 2048 kb/s
- SMB (E): IRIG-B00X / IRIG-B1XX / IRIG-B22X, PPS
- SMB (F): IRIG-B00X / IRIG-B15X IRIB-B22X, PPS
- SMA (G): GNSS
- SMB (H): 1.0/ 1.544 / 2.048 / 5.0 / 10.0 MHz

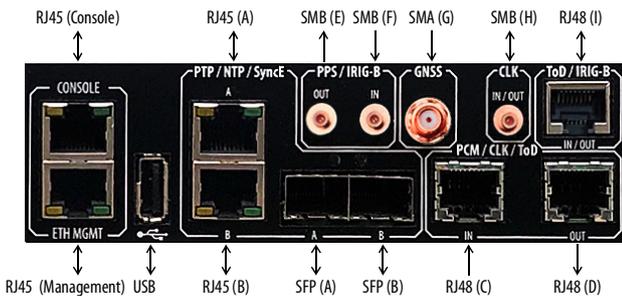


Figure 1. Mainframe connector layout

- RJ48 (I): IRIG-B00X, ToD (NMEA, G.8271), 1.0/ 1.544 / 2.048 / 5.0 / 10.0 MHz, 1544 / 2048 kb/s

### 1.1 Port Specification

- Custom delay compensation for phase and time inputs and outputs
- Customizable period in PPS outputs in steps on one second
- RS-422 / ITU-T V.11 levels for PPS and IRIG-B references over RJ-48
- Square pulse shape for clock (Hz) outputs (2.4 Vpp with 50Ω)
- Up to 25 Vpp with AC / DC coupling in IRIG-B SMB inputs
- Custom gain and impedance in IRIG-B SMB inputs
- Up to 4 Vpp with AC/DC coupling in IRIG-B1XX SMB outputs with a 50Ω load. 2.4 Vpp in IRIG-B0XX / IRIG-B22X with a 50Ω load.
- 2048 kb/s outputs comply with ITU-T G.703 pulse mask, 1544 kb/s outputs comply with ANSI T1.102-1999
- SSM generation in 2048 kb/s and 1544 kb/s outputs, SSM decoding in 2048 kb/s and 1544 kb/s inputs

### 2. Port Extensions

- Implemented through factory configurable and replaceable modules
- One slot for a custom port extension module

### 2.1 RIC-152 Module

Provides 2 x RJ48/SFP Extra Gigabit Ethernet, 4 x RJ48, 4 x BNC/ST, 1 x BNC and a 5-pin terminal block ports:

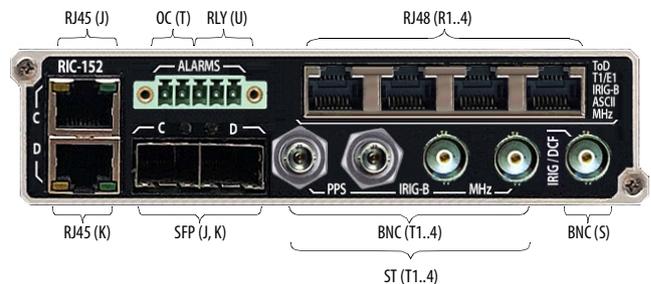


Figure 2. RIC-152 connector layout

- RJ45 (J, K): PTP, NTP SyncE
- SFP (J, K): PTP, NTP SyncE
- RJ48 (R1..4): IRIG-B00X, ToD (NMEA, G.8271), EH90, ASCII (NMEA, Meiberg)
- BNC (T1..4): IRIG-B00X, PPS, 1.0/ 1.544 / 2.048 / 5.0 / 10.0 MHz
- ST (T1..4): IRIG-B00X, PPS, 1.0/ 1.544 / 2.048 / 5.0 / 10.0 MHz
- BNC (S): IRIG-B1XX, DCF77
- OC (T): PPS, Alarm (Electronic – MOSFET driver – relay)


- RLY (U): Alarm (Electro-mechanic relay)

**Table 2.** RIC-152 ports and interfaces

	PTP	NTP	SyncE	ToD	IRIG-B	PPS	T1/E1	MHz	ASCII	DCF77	Alarm
RJ45 (J, K)	out	out	out								
SFP (J, K)	out	out	out								
RJ48 (R1..4)				out	out		out	out	out		
BNC (T1..4)					out	out		out			
ST (R1..4)					out	out		out			
BNC (S)					out					out	
OC (T)											out
RLY (U)											out

**2.2 RIC-50 Module**

Provides a combination of 5 x BNC / ST ports (up) and 5 x BNC ports:

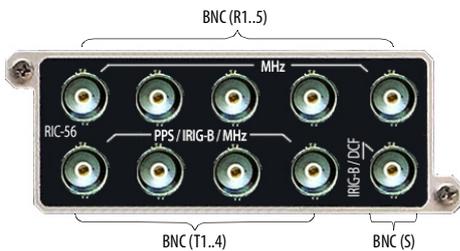

**Figure 3.** RIC-50 connector layout


- ST (R1..5): IRIG-B00X, PPS, 1.544 / 2.048 / 5.0 / 10.0 MHz
- BNC (R1..5): IRIG-B00X, PPS, 1.544 / 2.048 / 5.0 / 10.0 MHz
- BNC (T1..4): IRIG-B00X, PPS, 1.544 / 2.048 / 5.0 / 10.0 MHz
- BNC (S): IRIG-B1XX, DCF77

**Table 3.** RIC-50 ports and interfaces

	IRIG-B	PPS	DCF77	MHz
ST (R1..5)	out	out		out
BNC (R1..5)	out	out		out
BNC (S)	out		out	
BNC (T1..4)	out	out		out

**2.3 RIC-52 Module**

Provides 4 x RJ48 (up) and 5 x BNC (down) ports:

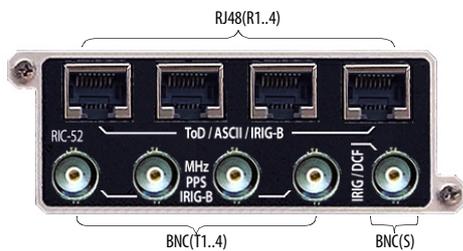

**Figure 4.** RIC-52 connector layout


- RJ48(R1..4): IRIG-B00X, ToD (NMEA, G.8271), ASCII (NMEA, Meinberg) with RS-232 levels
- BNC (T1..4): IRIG-B00X, PPS, 1.544 / 2.048 / 5.0 / 10.0 MHz
- BNC (S): IRIG-B1XX, DCF77

**2.4 RIC-54 Module**

**Table 4.** RIC-52 ports and interfaces

	ToD	IRIG-B	PPS	ASCII	DCF77	MHz
RJ48 (R1..4)	out	out		out		
BNC (S)		out			out	
BNC (T1..4)		out	out			out

Provides 5 x BNC (up) and a 16-pin terminal block (down) ports:

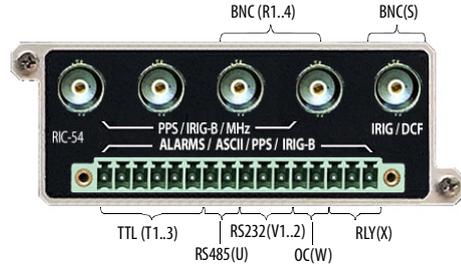

**Figure 5.** RIC-54 connector layout


- BNC (R1..4): IRIG-B00X, PPS, 1.544 / 2.048 / 5.0 / 10.0 MHz
- BNC (S): IRIG-B1XX, DCF77
- TTL (T1..3): IRIG-B00X, PPS
- RS232 (V1..2): ASCII (NMEA, Meinberg)
- RS485 (U): IRIG-B00X, ASCII (NMEA, Meinberg), PPS
- OC (W): PPS, Alarm (Electronic - MOSFET driver- relay)
- RLY (X): Alarm (Electro-mechanic relay)

**Table 5.** RIC-54 ports and interfaces

	IRIG-B	PPS	ASCII	DCF77	Alarm	MHz
BNC (R1..4)	out	out				out
BNC (S)	out			out		
TTL (T1..3)	out	out				
RS485 (U)	out	out	out			
RS232 (V1..2)			out			
OC (W)		out			out	
RLY (X)					out	

**2.5 RIC-56 Module**

Provides a combination of 5 x BNC / SMA ports (up) and 4 x BNC / SMA ports plus 1 BNC port (down):

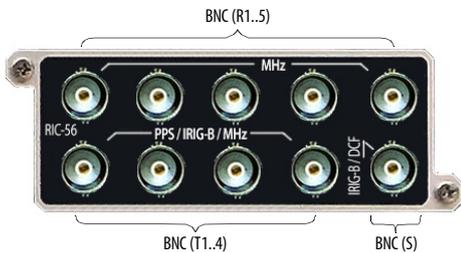

**Figure 6.** RIC-56 connector layout (BNC model)

- BNC / SMA (R1..5): 10 MHz sine wave
- BNC / SMA (T1..4): IRIG-B00X, PPS, 1.544 / 2.048 / 5.0 / 10.0 MHz square wave
- BNC / SMA (S): IRIG-B1XX, DCF77

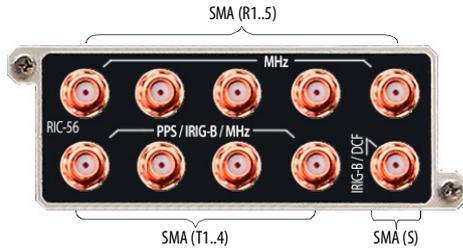


Figure 7. RIC-56 connector layout (SMA model)

Table 6. RIC-56 ports and interfaces

	IRIG-B	PPS	DCF77	MHz
BNC / SMA (R1..5)				out
BNC / SMA (S)	out		out	
BNC / SMA (T1..4)	out	out		out

2.6 RIC-82 Module

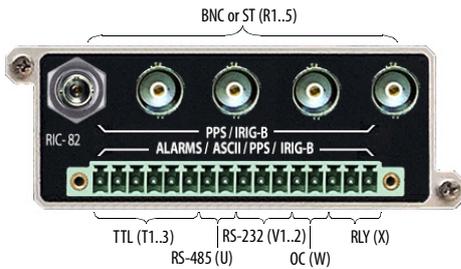


Figure 8. RIC-82 connector layout

Provides a combination of 5 x BNC / ST ports (up) and 16-pin block:

- ST (R1..5): IRIG-B00X, PPS
- BNC (R1..5): IRIG-B00X, PPS
- TTL (T1..3): IRIG-B00X, PPS
- RS232 (V1..2): ASCII (NMEA, Meinberg)
- RS485 (U): IRIG-B00X, ASCII (NMEA, Meinberg), PPS
- OC (W): PPS, Alarm (Electronic –MOSFET driver– relay)
- RLY (X): Alarm (Electro-mechanic relay)

Table 7. RIC-82 ports and interfaces

	IRIG-B	PPS	ASCII	Alarm
ST (R1..5)	out	out		
BNC (R1..5)	out	out		
TTL (T1..3)	out	out		
RS485 (U)	out	out	out	
RS232 (V1..2)			out	
OC (W)		out		out
RLY (X)				out

2.7 RIC-84 Module

Provides a combination of 5 x BNC / ST ports (up) and 16-pin block:

- ST (R1..5): IRIG-B00X, PPS
- BNC (R1..5): IRIG-B00X, PPS
- TTL(T1..3): IRIG-B00X, PPS
- OC (U): PPS, Alarm (Electronic –MOSFET driver– relay)
- RS232(V1..2): ASCII (NMEA, Meinberg)

- OC (W): PPS, Alarm (Electronic –MOSFET driver– relay)
- RLY (X): Alarm (Electro-mechanic relay)

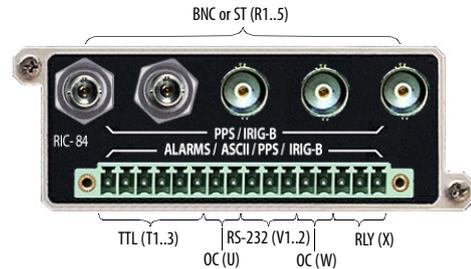


Figure 9. RIC-84 connector layout

Table 8. RIC-84 ports and interfaces

	IRIG-B	PPS	ASCII	Alarm
ST (R1..5)	out	out		
BNC (R1..5)	out	out		
TTL (T1..3)	out	out		
OC (U)		out		out
RS232 (V1..2)			out	
OC (W)		out		out
RLY (X)				out

2.8 Oscillator Performance (Locked to GNSS)

Table 9. Frequency accuracy (1 day observation time)

Observation	TCXO	OCXO	OCXO HQ	Rb	Rb HQ
Single-band	2.0e <sup>-12</sup>	1.0e <sup>-12</sup>	1.0e <sup>-12</sup>	1.0e <sup>-12</sup>	1.0e <sup>-12</sup>
Multi-band	1.0e <sup>-12</sup>	5.0e <sup>-13</sup>	5.0e <sup>-13</sup>	5.0e <sup>-13</sup>	5.0e <sup>-13</sup>

Table 10. RMS phase error

GNSS	TCXO	OCXO	OCXO HQ	Rb	Rb HQ
Single-band	±30ns	±20ns	±20ns	±15ns	±15 ns
Multi-band	±15 ns	±10ns	±10 ns	±5 ns	±5 ns

Table 11. Locking time

	TCXO	OCXO	OCXO HQ	Rb	Rb HQ
	< 5 ns	< 10 min	< 15 min	< 4 hours	< 4 hours

2.9 Oscillator Performance (Holdover mode)

Table 12. Holdover time accuracy (±1 °C)

Phase within	TCXO	OCXO	OCXO HQ	Rb	Rb HQ
± 100 ns	10 seconds	30 minutes	2 hours	8 hours	10 hours
± 500 ns	1 minute	2 hours	8 hours	14 hours	30 hours
± 1.0 μs	2 minutes	4 hours	18 hours	28 hours	60 hours
± 10.0 μs	10 minutes	1 day	2 days	8 days	12 days

Table 13. Holdover frequency accuracy after one day (±1 °C)

	TCXO	OCXO	OCXO HQ	Rb	Rb HQ
	-	1.0 e <sup>-10</sup>	2.0 e <sup>-11</sup>	1.0 e <sup>-11</sup>	5.0e <sup>-12</sup>

2.10 Oscillator Aging

Table 14. Aging

	TCXO	OXCXO	OXCXO HQ	Rb	Rb HQ
Daily	2.0e <sup>-8</sup>	5.0e <sup>-10</sup>	1.0e <sup>-10</sup>	2.5e <sup>-10</sup>	2.5e <sup>-11</sup>
Monthly	-	-	-	1.0e <sup>-10</sup>	5.0e <sup>-11</sup>
Yearly	5.0e <sup>-7</sup>	5.0e <sup>-8</sup>	1.0e <sup>-8</sup>	1.5e <sup>-9</sup>	6.0e <sup>-10</sup>

3. Clock functions

- Hierarchical clock reference input configuration
- Automatic Reference switchover on detection of input degradation
- Custom and predefined time zones
- Unmanaged leap second adjustment and reporting

4. GNSS Synchronization Inputs

- Connector: SMA (50 Ω)
- Fixed position mode for GNSS references
- Automatic setting of UTC-to-TAI offset (leap seconds) through GNSS
- 4V - 5V DC output in GNSS port to feed an external antenna
- Cable delay compensation
- Automatic antenna detection

4.1 Single-band Receiver

- 72-channel receiver
- Sensitivity: -166 dBm (tracking), -148 dBm (cold start)
- Concurrent selection of up to three satellite constellations.
- Anti-jamming technology
- Bands: (1) GPS L1, (2) GLONASS L10F, (3) Galileo E1B/C, (4) BeiDou B1

4.2 Multi-band Receiver

- 184-channel receiver
- Sensitivity: -167 dBm (tracking), -148 dBm (cold start)
- Concurrent selection of up to three satellite constellations
- Simultaneous operation in two different frequency bands
- Anti-jamming and anti-spoofing technology
- Bands: (1) GPS L1C/A, L2C, L5, (2) GLONASS L10F, (3) Galileo E1B/C, E5b, E5a, (4) BeiDou B1I, B1C, B2a, (5) NavIC L5

5. Ethernet

- RJ45 / SFP work in combo mode, only one of each pair is active
- RJ45 interfaces: 10BASE-T, 100BASE-TX, 1000BASE-T
- SFP interfaces: 100BASE-FX, 1000BASE-LX, 1000BASE-ZX, 1000BASE-SX
- Auto-negotiation 10 / 100 / 1000 Mb/s
- Ability to disable auto-negotiation and force line settings

6. PRP Function

- Parallel Redundancy Protocol (PRP) Link Redundancy Entity (LRE) as IEC 62439-3, generation of RCT trailers on Ethernet frames
- Duplicate discard mode and PRP supervision generation / decoding
- PRP extensions for IEEE 1588-2088 / IEC 61588: 2009 defined in IEC 62439-3 Annex A connected with grandmaster clock operation

7. Protocols

- DIX and IEEE 802.1Q Ethernet frame formats
- Configuration of the VLAN VID
- User Priority if the VLAN encapsulation is enabled (IEEE 802.1Q format)
- Configuration of DSCP CoS labels
- ARP (IETF RFC 826) for automatic resolution of remote MAC address in IP Endpoint mode (IPv4 network protocol)
- DHCP (client side) (IETF RFC 2131)
- Static IPv4 local profile configuration

8. PTP Function

- Up to 1024 unicast users (256 per port)
- IEEE 1588-2008 Annex J, Default profiles
- IEC 61850-9-3, Utility Profile
- IEEE C37.238-2011, Power Profile 2011
- IEEE C37.238-2017, Power Profile 2017

- ITU-T G.8265.1, Telecom frequency profile
- ITU-T G.8275.1, Telecom phase and time profile
- ITU-T G.8275.2, Telecom PTS / APTS profile

9. NTP Function

- Up to 500.000 transactions/s in server mode
- NTP protocol versions: NTPv3 (RFC 1305), NTPv4 (RFC 5905)
- SNTP protocol versions: SNTPv3 (RFC 1769)
- MD5 and SHA1 authenticated NTP transactions

10. SyncE Function

- Synchronous Ethernet clock input or output from port B / K
- Synchronous Ethernet clock output from port A / J
- RJ-45: 100BASE-TX, 1000BASE-T
- SFP: 100BASE-FX, 1000BASE-SX / LX / ZX
- Generation, decoding, forwarding of ESMC

11. Packet Services

- Packet Grandmaster: up to four independent PTP, NTP and SyncE outputs
- PRP Grandmaster: up to two independent PTP and NTP outputs over PRP
- Sync Gateway: one PTP, NTP and SyncE input and three independent PTP, NTP and SyncE outputs
- Hybrid Sync Gateway: one PTP, NTP, SyncE input, one PTP, NTP, SyncE output and one PTP and NTP output over PRP

12. Statistics

- Current, max / min traffic in b/s, frames/s, % channel capacity
- Unicast, multicast, broadcast traffic in b/s, frames/s, % channel capacity
- IPv4 and IPv6 statistics in b/s, frames/s, % channel capacity
- UDP traffic in b/s, frames/s, % channel capacity
- Simultaneous per-port statistics for ports A and B

12.1 PRP LRE Statistics

- Port A / B / J / K and aggregated inbound and outbound frames
- Port A / B / J / K and aggregated inbound and outbound RCT frames
- Port A / B / J / K, LAN A / B / C / D mismatches
- Port A / B / J / K and aggregated errors
- Port A / B / J / K unique entries
- Port A / B / J / K single duplicated entries
- Port A / B / J / K multiple duplicated entries
- PRP node count
- Source MAC address, time to live and node time for each entry

13. Platform

13.1 Ports

- RJ45: RS-232 console
- RJ45: Ethernet management
- USB: Storage

13.2 Management

- Web application running over HTTP or HTTPS
- Custom SSL certificates for the web application
- CLI management interface through Console interface
- SSH and Telnet remote management through ETH MGMT interface
- USB soft and firmware updates
- RFC 3164 Syslog event reporting (device role)
- Support of SNMPv2c as defined in RFC 1901
- Support of SNMPv3 as defined in RFC 3410, RFC 3411, RFC 3412
- Support of SNMP traps to report events through SNMPv2c and SNMPv3
- Ability to enable or disable management protocols separately

13.3 User Access Control

- Creation, configuration and management of user accounts
- RADIUS (Remote Authentication Dial-In User Service)
- TACACS+ (Terminal Access Controller Access-Control System Plus)
- User roles with custom access rights
- Advanced user access management policies
- Ability to grant or deny access based on user location (IP address)

13.4 Ergonomics

- Fanless operation
- Dimensions: 44 mm x 228 mm x 435 mm (equivalent to 1U in 19" rack)
- Weight: 1.9 kg / 4.2 lb
- MTBF: 150,000 hours (T/OCXO models), 140,000 hours (Rub. models)

13.5 LCD Display with Keyboard

- Display: LCD STN blue, 192 x 32 pixels
- Keyboard: Up, Down, Enter

Information displayed

- Date: Day, Time, Time scale (UTC or local time)
- Oscillator status: Free, Locked, Locking, Holdover...
- Clock reference input: GNSS, PTP, NTP...
- Position: latitude, longitude, height
- System: Serial number, Software version, MAC address
- Mngt Network: IP addr, Subnetwork mask, Gateway, DNS

13.6 Power Supply

- Redundant power supply (Single or Double)
- AC: 100 ~ 240 VAC, 50- 60 Hz (IEC 60320 C13/C14)
- DC: 18 ~ 75 VDC or 43 ~160 VDC (2-pin 5.1 mm)
- AC/DC: 85 - 264 VAC and 100 - 370 VDC (2-pin 5.1 mm)
- Power consumption: 10 W (T/OCXO models), 14 W (Rubidium models)

13.7 LEDs

- Platform: PSU1, PSU2, System
- Application: Alarm, GNSS, Locked

13.8 USB

- Software and firmware upgrade
- Configuration, results, user files

13.9 Environmental

- Storage: -40 ~ +85°C
- Operating: -40 ~ +70°C temp. / 0 ~ 95%RH (non condensing)

13.10 Other

Electromechanical relay rating

- Voltage: 240 VAC, 30 VDC (MOV protected)
- Current: 3 A

Solid state (open collector) relay rating

- Max. voltage: 300 V (MOV protected)
- Max. current: 120 mA

14. Certifications

14.1 Summary

- Communications devices installed in substations: IEEE 1613, IEC 61850-3
- Electromagnetic compatibility: CISPR 22 / EN 55022, CISPR 24 / EN 55024, IEC 61000-3-2, IEC 61000-3-3, CFR 47 part 15
- Environmental: IEC 61850-3
- Safety: IEC/EN 61850-3, IEC/EN 62368-1, UL 62368-1, CSA C22.2 No. 62368-1
- Other: EN 63000 (RoHS), EN 303 413 V1.1.1 (RED)

14.2 Electromagnetic Compatibility (Emission)

- Conducted Disturbance: CISPR 22 / EN 55022 (Class B), CFR 47 Part 15
- Radiated Emissions: CISPR 22 / EN 55022 (Class B), CFR 47 Part 15
- Harmonics of Current: IEC 61000-3-2 (Class A)
- Voltage Fluctuation and Flicker: IEC 61000-3-3

14.3 Electromagnetic Compatibility (Immunity)

Radiated RF Susceptibility (RS)

- IEEE C37.90.2: 80 ~ 1000 MHz, 20 V/m, 80% AM (1 kHz)
- IEC 61000-4-3: 80 ~3000 MHz, 10 V/m, 80% AM (1 kHz)

Conducted RF Susceptibility (CS)

- IEC 61000-4-6: 0.15 ~80 MHz, 10 Vrms, 80% AM (1 kHz)

Electrostatic discharge (ESD) immunity

- IEEE C37.90.3: 15 kV air discharge, 8 kV contact discharge
- IEC 61000-4-2: 2008: 8 kV air discharge, 6 kV contact discharge

Electrical fast transient / burst (EFT) immunity

- IEEE C37.90.1: 4 kV in power and telecom ports
- IEC 61000-4-4: 2 kV in power and earth ports, 4 kV in telecom ports

Damped oscillatory wave immunity

- IEEE C37.90.1
- 2.5 kV (1 MHz) in power and telecom ports
- IEC 61000-4-18
- 0.5 kV diff. / 1 kV comm, (1 MHz) in power port
- 1 kV diff. / 2.5 kV comm, (1 MHz) in telecom ports

Surge immunity

- IEC 61000-4-5
- Power port line to line 1 kV, line to ground 2 kV
- Telecom port line to line: 2 kV, line to ground: 4 kV

Power frequency immunity

- IEC 61000-4-16
- 30 V (continuous) and 300 V (1 s) in telecom port
- 10 V (continuous) and 100 V (1 s) in power port

Power frequency magnetic field immunity

- IEC 61000-4-8
- 100 A/m (continuous) and 1000 A/m (1 s)

Power supply immunity

- IEC 61000-4-11
- IEC 61000-4-17
- IEC 61000-4-29

14.4 Reliability

- Cold storage: IEC 60068-2-1, -40°C, 16 hours
- Cold operation: IEC 60068-2-1, -40°C, 16 hours
- Dry heat storage: IEC 60068-2-2, +85°C, 16 hours
- Dry heat operation: IEC 60068-2-2, +70°C, 16 hours
- Change of temperature: IEC 60068-2-14, -10 ~ + 65°C, 5 cycles
- Damp heat cyclic: IEC 60068-2-30, +25~+40°C, 55~93%RH, 6 cycles
- Damp heat steady state: IEC 60068-2-78, +40°C, 55%RH, 10 days
- Vibration response: IEC 60255-21-1 (Class 1)
- Vibration endurance: IEC 60255-21-1 (Class 1)
- Shock response: IEC 60255-21-2 (Class 1)
- Shock Withstand: IEC 60255-21-2 (Class 1)
- Bump: IEC 60255-21-2 (Class 1)
- Seismic test: IEC 60255-21-3 (Class 2)
- Degrees of protection provided by enclosures: IEC 60529 (IP30)

14.5 Safety

- Communications devices installed in power substations IEC / EN 61850-3
- Audio / Video, information and communication technology equipment IEC / EN 62368-1, UL 62368-1, CSA C22.2 No. 62368-1

15. Ordering Information

Table 15. Base configuration

Code	Description
NT.OMG.GM.ACDC	Net.Time NTP Server / Grandmaster Clock. Includes dual 10 / 100 / 1000 Mb/s electrical Ethernet port and dual 100 / 1000 Mb/s optical Ethernet supplying synchronization through the Network Time Protocol version 3 (RFC 1305), version 4 (RFC 5905) and Simple Network Time Protocol version 3 (RFC 1769). Internal TCXO timing source. GPS, GLONASS, BeiDou and Galileo clock reference input. 1PPS, 1PP2S and time-of-day clock reference inputs and outputs. Frame and network statistics. Console and Ethernet management ports. Simple Network Management Protocol (SNMP) management. Web Server. USB firmware upgrade. Single AC 85 – 264 V / DC 100 – 370 V (2-pin 5.1 mm) power supply unit (PSU-ACDC).
NT.OMG.GM.AC	Net.Time NTP Server / Grandmaster Clock. Includes dual 10 / 100 / 1000 Mb/s electrical Ethernet port and dual 100 / 1000 Mb/s optical Ethernet supplying synchronization through the Network Time Protocol version 3 (RFC 1305), version 4 (RFC 5905) and Simple Network Time Protocol version 3 (RFC 1769). Internal TCXO timing source. GPS, GLONASS, BeiDou and Galileo clock reference input. 1PPS, 1PP2S and time-of-day clock reference inputs and outputs. Frame and network statistics. Console and Ethernet management ports. Simple Network Management Protocol (SNMP) management. Web Server. USB firmware upgrade. Single AC 100 – 240 V, 50 – 60 Hz (IEC 60320 C13/C14) power supply unit (PSU-AC).
NT.OMG.GM.DCL	Net.Time NTP Server / Grandmaster Clock. Includes dual 10 / 100 / 1000 Mb/s electrical Ethernet port and dual 100 / 1000 Mb/s optical Ethernet supplying synchronization through the Network Time Protocol version 3 (RFC 1305), version 4 (RFC 5905) and Simple Network Time Protocol version 3 (RFC 1769). Internal TCXO timing source. GPS, GLONASS, BeiDou and Galileo clock reference input. 1PPS, 1PP2S and time-of-day clock reference inputs and outputs. Frame and network statistics. Console and Ethernet management ports. Simple Network Management Protocol (SNMP) management. Web Server. USB firmware upgrade. Single DC 18 – 75 V (2-pin 5.1 mm) power supply unit (PSU-DCL).
NT.OMG.GM.DCH	Net.Time NTP Server / Grandmaster Clock. Includes dual 10 / 100 / 1000 Mb/s electrical Ethernet port and dual 100 / 1000 Mb/s optical Ethernet supplying synchronization through the Network Time Protocol version 3 (RFC 1305), version 4 (RFC 5905) and Simple Network Time Protocol version 3 (RFC 1769). Internal TCXO timing source. GPS, GLONASS, BeiDou and Galileo clock reference input. 1PPS, 1PP2S and time-of-day clock reference inputs and outputs. Frame and network statistics. Console and Ethernet management ports. Simple Network Management Protocol (SNMP) management. Web Server. USB firmware upgrade. Single DC 43 – 160 V (2-pin 5.1 mm) power supply unit (PSU-DCH).

Table 16. Hardware options

Code	Description
NT.OMG.FHM.LCD	Adds LCD screen and control keyboard.
NT.OMG.FHM.OCXO	OCXO oscillator.
NT.OMG.FHM.OCXO.HQ	OCXO HQ oscillator.
NT.OMG.FHM.RB	Rubidium oscillator.
NT.OMG.FHM.RB.HQ	Rubidium HQ internal oscillator.
NT.OMG.FHM.MB	Replaces the standard GNSS receiver by multi-band receiver. Compatible with GPS, GLONASS, Galileo, BeiDou and NavIC. Jamming and spoofing detection and mitigation.
NT.OMG.PSU.AC	Adds an additional AC 100 – 240 V, 50 – 60 Hz (IEC 60320 C13/C14) power supply unit.
NT.OMG.PSU.ACDC	Adds an additional AC/DC 85 – 264 VAC / 100 – 370 VDC (2-pin 5.1 mm) power supply unit.
NT.OMG.PSU.DCL	Adds an additional low voltage DC 18 – 75 V (2-pin 5.1 mm) power supply unit.
NT.OMG.PSU.DCH	Adds an additional high voltage DC 43 – 160 V (2-pin 5.1 mm) power supply unit.
NT.OMG.RIC.50	Provides additional clock reference outputs. Includes PPS, IRIG-B00X and frequency references in 5 x BNC ports. Includes PPS, IRIG-B00X and frequency references in 4 x BNC ports. Includes IRIG-B1XX and DCF77 in a single BNC port.
NT.OMG.RIC.52	Provides additional clock reference outputs. Includes ToD, ASCII and IRIG-B00X references in 4 x RS-232 ports (RJ48 connector). Includes PPS, IRIG-B00X and frequency references in 4 x BNC ports. Includes IRIG-B1XX and DCF77 in a single BNC port.

Table 16. Hardware options

Code	Description
NT.OMG.RIC.54	Provides additional clock reference outputs. Includes PPS, IRIG-B00X and frequency references in 4 x BNC ports. Includes IRIG-B1XX and DCF77 in a single BNC port. Includes miscellaneous references, time codes and alarm relay functions in 3 x TTL, 1 x RS-485, 2 x RS-232, 1 x open collector and 1 x electro-mechanic relay outputs.
NT.OMG.RIC.56.X	Provides additional clock reference outputs. Includes 10 MHz sine wave in 5 x BNC / SMA factory configurable ports. Includes PPS, IRIG-B00X and frequency references in 4 x BNC / SMA factory configurable ports. Includes IRIG-B1XX and DCF77 in a single BNC / SMA port.
NT.OMG.RIC.82.X	Provides additional clock reference outputs. Includes PPS and IRIG-B00X references in 5 x BNC / ST factory configurable ports. Includes miscellaneous references, time codes and alarm relay functions in 3 x TTL, 1 x RS-485, 2 x RS-232, 1 x open collector and 1 x electro-mechanic relay outputs.
NT.OMG.RIC.84.X	Provides additional clock reference outputs. Includes PPS and IRIG-B00X references in 5 x BNC / ST factory configurable ports. Includes miscellaneous references, time codes and alarm relay functions in 3 x TTL, 2 x RS-232, 2 x open collector and mechanic relay outputs.
NT.OMG.RIC.152.X	Adds dual 10 / 100 / 1000 Mb/s electrical Ethernet port and dual 100 / 1000 Mb/s optical Ethernet supplying synchronization through the NTP v3 (RFC 1305), v.4 (RFC 5905) and SNTP v.3 (RFC 1769). Provides additional clock reference outputs. Includes ToD / EH90, ASCII, IRIG-B00X, T1 / E1 and frequency references in 4 x RS-232 ports (RJ48 connector). Includes PPS, IRIG-B00X and frequency references in 4 x BNC / ST factory configurable ports. Includes IRIG-B1XX and DCF77 in a single BNC port. Includes 1 x open collector and relay outputs.

Table 17. Optional Software options

Code	Description
NT.OMG.PTPD	PTP IEEE 1588-2008 Annex J (Default Profiles) up to 64 slave clocks.
NT.OMG.PTPT	ITU-T G.8261.1 (Telecom frequency profile), ITU-T G.8275.1 (Telecom phase and time profile) and ITU-T G.8275.2 (PTS / APTS profile) up to 64 slave clocks.
NT.OMG.PTPU	IEC 61850-9-3 (Utility Profile), IEEE C37.238-2011 (Power Profile 2011) and IEEE C37.238-2017 (Power Profile 2017) up to 64 slave clocks.
NT.OMG.SE	Synchronous Ethernet frequency outputs. ESMC generation as specified in ITU-T G.8261, G.8262 and G.8264.
NT.OMG.BC	Adds PTP profile translation functionality. Adds support for PTP to NTP protocol translation.
NT.OMG.PRP	Parallel Redundancy Protocol following IEC 62439-3 for simultaneous transmission of information over two redundant Ethernet ports with zero seconds fail-over recovery time.
NT.OMG.FREQ	Provides support for 1, 1.544, 2.048, 5, 10 MHz and 1.544, 2.048 Mb/s clock reference inputs and outputs
NT.OMG.IRIG	Inter Range Instrumentation Group type B (IRIG-B) time codes input and output over balanced or unbalanced interface.
NT.OMG.GM.USR128	Increases number of client unicast clocks per port from 64 to 128.
NT.OMG.GM.USR256	Increases number of client unicast clocks per port from 64 to 256.

Table 18. Accessories

Code	Description
NT.ANT	GNSS kit for fixed installation up to 50 m. Includes surge arrester, 3 m TNC-SMA patch cable. Cable not included.
NT.ANTC	GNSS kit for fixed installation up to 200 m. Includes antenna, surge arrester, in-line amplifier 25 dB gain, 3 m TNC-SMA patch cable, 20 cm TNC-TNC low loss coaxial cable. Cable not included.
NT.ANT.MB	GNSS antenna kit for fixed installation up to 50 m. Compatible with L1 and L5 frequency bands. Includes antenna, surge arrester, 3 m TNC-SMA patch cable and accessories. Cable not included.
NT.ANTC.MB	GNSS antenna kit for fixed installation up to 200 m. Compatible with L1 and L5 frequency bands. Includes antenna, surge arrester, in-line amplifier 25 dB gain, 3 m TNC-SMA patch cable, 20 cm TNC-TNC low loss coaxial cable and accessories. Cable not included.